



Shiwu Industry

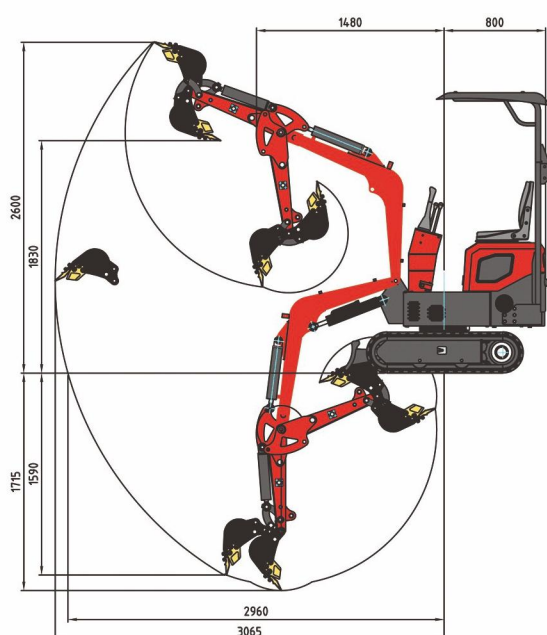

Shandong Shiwu Industry Co.,LTD
No.127 Lei Gu Shi St.,Taian,Shandong,China
Tel:0086-538-6130072
Cell:0086-18660828228
Fred@shiwuindustry.com

Excavator ES10

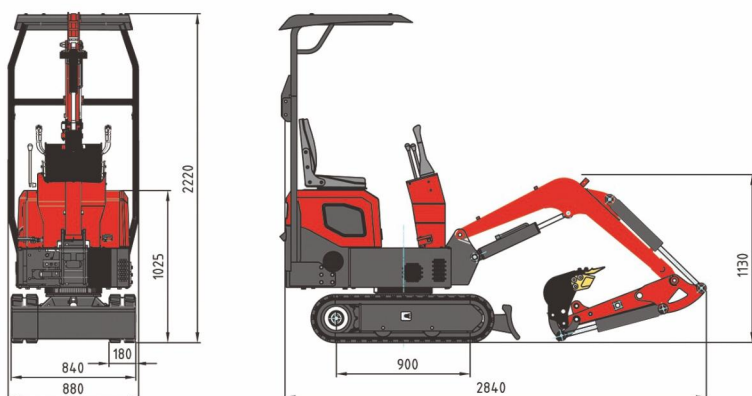

ES10	
Specifications	
Bucket Capacity	0.023cbm
Swing Speed	0-13rpm
Gradeability	30°
Max.Bucket Digging Force	7.2KN
Max.Arm Digging Force	4.6KN
Engine Model	KD192F-1
Power/Revolution Speed	7KW/3000rpm
System Pressure	16MPa
Working range	
Max.Digging Height	2600mm
Max.Dumping Height	1830mm
Max.Digging Depth	1715mm
Max.Vetical Digging Depth	1590mm
Max. Digging Radius	3065mm
Min.Swing Radius	1480mm
Machine size	
Total Length	2840mm
Total Width	880mm
Total Height	2220mm
Cabin Height	2220mm
Axle Base	900mm
Track Distance	660mm
Minimum Ground Clearance	132mm
Tail Swing Radius	800mm

Attachments Options

			
Log Grapple	Hydraulic Quick Hitch	Hydraulic Thumb Bucket	Rake
			
Breaker	Ripper	Five Peels Grapple	Grass Grapple





Our machinery tools meet your needs

Shiwu Industry



Shandong Shiwu Industry Co.,LTD
No.127 Lei Gu Shi St.,Taian,Shandong,China
Tel:0086-538-6130072
Cell:0086-18660828228
Fred@shiwuindustry.com

Excavator ES18

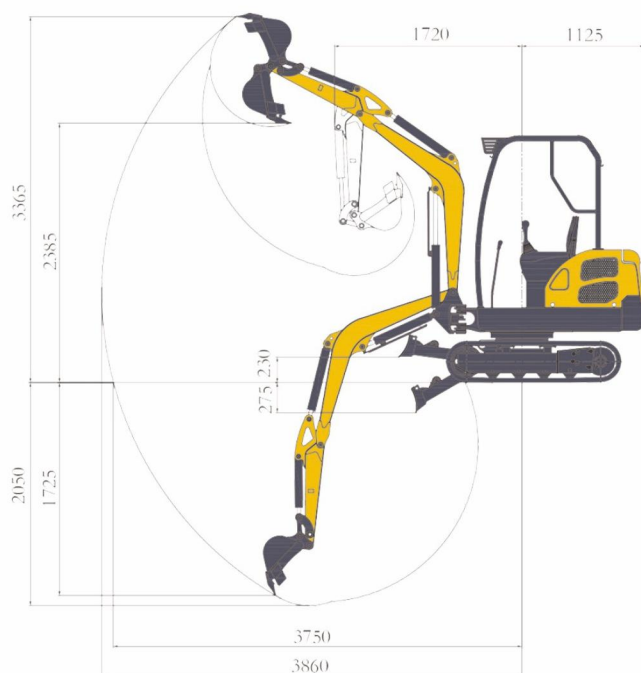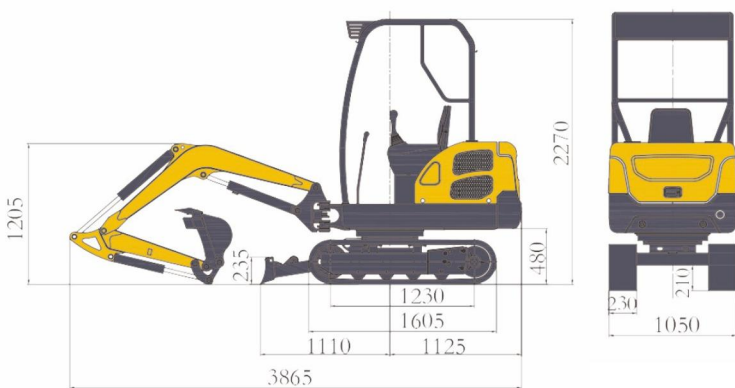

ES18	
Specifications	
Bucket Capacity	0.06cbm
Swing Speed	10-12rpm
Gradeability	35°
Max.Bucket Digging Force	14KN
Max.Arm Digging Force	10KN
Engine Model	3TE25
Power/Revolution Speed	18.4KW/2350rpm
System Pressure	18MPa
Working range	
Max.Digging Height	3365mm
Max.Dumping Height	2385mm
Max.Digging Depth	2050mm
Max.Vetical Digging Depth	1725mm
Max. Digging Radius	3860mm
Min.Swing Radius	1720mm
Max.Dozer Blade Lifting Distance	230mm
Max.Dozer Blade Cutting Distance	275mm
Boom Swing Angle (Left)	75°
Boom Swing Angle (Right)	45°
Machine size	
Total Length	3865mm
Total Width	1050mm
Total Height	2270mm
Cabin Height	2270mm
Axle Base	1230mm
Track Distance	820mm
Minimum Ground Clearance	210mm
Tail Swing Radius	1125mm

Attachments Options

			
Log Grapple	Hydraulic Quick Hitch	Hydraulic Thumb Bucket	Rake
			
Breaker	Ripper	Five Peels Grapple	Grass Grapple




Our machinery tools meet your needs

Shiwu Industry



Shandong Shiwu Industry Co.,LTD
No.127 Lei Gu Shi St.,Taian,Shandong,China
Tel:0086-538-6130072
Cell:0086-18660828228
Fred@shiwuindustry.com

Excavator ES20

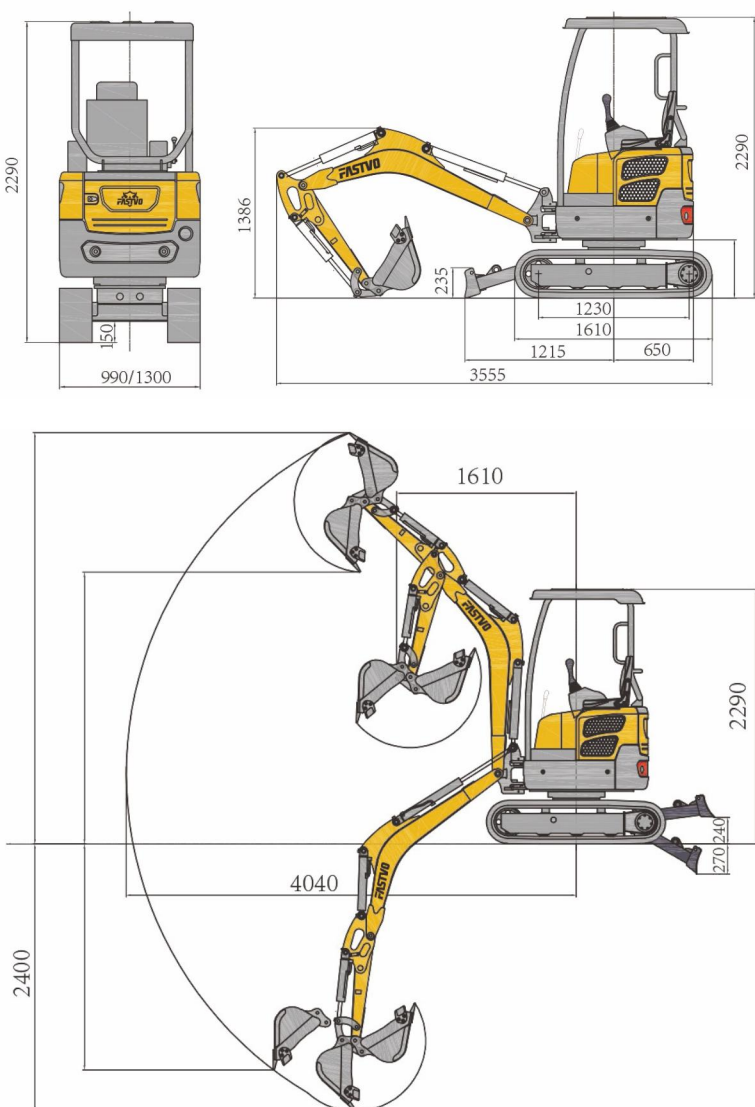

ES20	
Specifications	
Bucket Capacity	0.07cbm
Swing Speed	0-9rpm
Gradeability	35°
Max.Bucket Digging Force	18KN
Max.Arm Digging Force	11KN
Engine Model	KUBOTA D1105
Power/Revolution Speed	14.2KW/2000rpm
System Pressure	21.5MPa
Working range	
Max.Digging Height	3700mm
Max.Dumping Height	2440mm
Max.Digging Depth	2400mm
Max.Vetical Digging Depth	2025mm
Max. Digging Radius	4040mm
Min.Swing Radius	1610mm
Max.Dozer Blade Lifting Distance	240mm
Max.Dozer Blade Cutting Distance	270mm
Machine size	
Total Length	3555mm
Total Width	990/1300mm
Total Height	2290mm
Cabin Height	2290mm
Axle Base	1230mm
Track Distance	760mm
Minimum Ground Clearance	150mm
Tail Swing Radius	650mm

Attachments Options

			
Log Grapple	Hydraulic Quick Hitch	Hydraulic Thumb Bucket	Rake
			
Breaker	Ripper	Five Peels Grapple	Grass Grapple



Our machinery tools meet your needs